



Specification Sheet

Part # HDL-FSHB-XXW-XXI

Food Safety Rated Linear High Bay

PROJECT NAME	
CATALOG #	
NOTES	
FIXTURE TYPE	

Product Description

How Digital's NSF rated LED light fixtures are certified for use in environments where sanitary conditions and food safety are a must. Our NSF rated linear high bay provides several light distribution options and is IP69 rated to withstand the daily washdowns required to prevent bacteria growth or harborage of other contaminants. High Bays are available with an optional motion/daylight sensor and are programmable to reduce energy consumption in both occupied and unoccupied areas. Rugged and durable construction ensure years of hassle-free use with minimal maintenance required. All How Digital light fixtures come standard with the latest in high efficacy LM80 certified LED chips and carry a 5-year product warranty.



Part numbers and Specifications


Model	Watts	CCT	CRI	lm/W	Luminous Flux	Voltage	Fixture Length
HDL-FSHB-80W-XXK	80	3000°k 3500°k 4000°k 5000°k 6500°k	>80	>150	12,000 lm	100-277V	17.6 in
HDL-FSHB-120W-XXK	120				18,000 lm		21.9 in
HDL-FSHB-160W-XXK	160				24,000 lm		21.9 in
HDL-FSHB-200W-XXK	200				30,050 lm		21.9 in
HDL-FSHB-300W-XXK	300				45,000 lm		31.8 in

Mounting: Suspended or Surface Mounted


Limited Warranty: 5 years

For additional warranty information visit www.howd.com


Light Distribution




15°




25°




40°



60°



90°



120°

Part # HDL-FSHB-XXW-XXX

Food Safety Rated Linear High Bay



How Digital
Specification Sheet

Applications

- Food Processing Plants
- Food Storage Areas
- Sanitary Environments
- Warehouses
- Food Transportation Depots
- Food Inspection Facilities
- Restaurants & Food Handling Environments
- Grocery Chains (back of house)


Product Specifications

- Simple Installation & Operation
- White Aluminum Housing
- Durable and Water-Shedding
- Resistance to Harsh Cleaning Solvents
- Break-proof and Shatter-proof Glass
- Hose Washdown @ 1500 psi
- Operating Temperature: -40°F to 113°F
- >50,000 hours @ L70
- 5-Year Warranty


Electrical System

- Input Voltage: 100 – 277 VAC (50 – 60 Hz)
- Available in 480V
- Power Factor: ≥95%
- THD: ≤15% at Full Load

Test and Certifications




Product Dimensions



2.71"

17.63" (80W) 21.91" (120W-200W) 31.88" (300W)

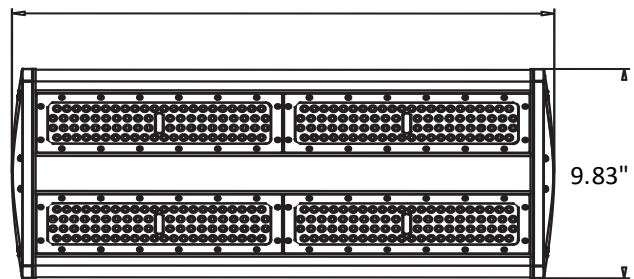

9.83"

