



Specification Sheet

Part # HDL-GA2-XXW-XXK

Premium Series Garage/Canopy Light

PROJECT NAME	
CATALOG #	
NOTES	
FIXTURE TYPE	

Product Description

How Digital's Premium Garage and Canopy LED light fixtures have been installed at some of the busiest garages and gas stations in the world. The fixture provides 160° light distribution ensuring more than adequate light from typical garage mounting heights (about 10 feet) with less dark spots and absolutely no flickering as compared to traditional or fluorescent fixtures. Garage and Canopy fixtures are available with an optional motion/daylight sensor and are programmable to reduce energy consumption in both occupied and unoccupied areas. Rugged and durable construction ensure years of hassle-free use with minimal maintenance required. All How Digital light fixtures come standard with the latest in high efficacy LM80 certified LED chips and carry a 7-year product warranty.


Part numbers and Specifications

Model	Watts	CCT	CRI	lm/W	Luminous Flux	Voltage	Net Weight
HDL-GA2-25W-XXK	25	4000°k 5000°k	>80	>132	3,375 lm	100-277V	3.5 lbs.
HDL-GA2-40W-XXK	40				5,400 lm		3.5 lbs.
HDL-GA2-60W-XXK	60				8,100 lm		3.5 lbs.
HDL-GA2-70W-XXK	70				10,850 lm		3.75 lbs.
HDL-GA2-SLCT-XXK	60/40/25				8,100 lm		3.75 lbs.


Mounting Options: Surface, Pendant or Conduit Mounted

Limited Warranty: 7 years

For additional warranty information visit www.howd.com

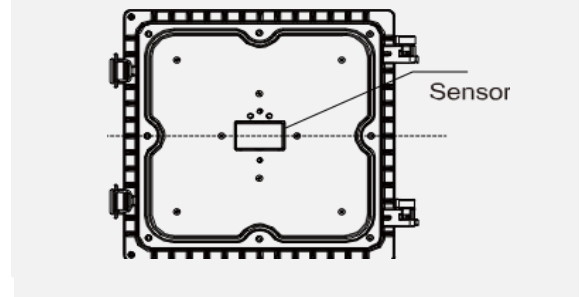


Light Distribution

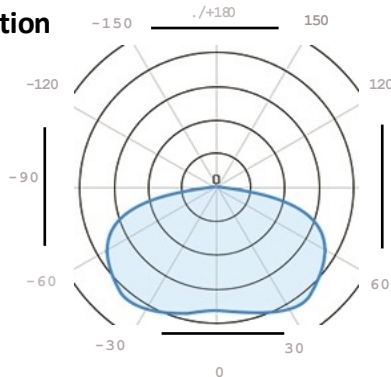

Installation



Surface



Pendant



Conduit

Part # HDL-GA2-XXW-XXK

Premium Series Garage/Canopy Light



How Digital
Specification Sheet

Applications

- Parking Garages
- Gas Stations
- Airports
- Train Stations
- Bus Depots
- Valet Stands
- Storage Units
- Hallways

Product Specifications

- Simple Installation
- Low Maintenance
- Sleek Design
- Available in Bronze and White
- Available with optional EM
- Available with optional Motion Sensor and Photocell
- Working Temperature: -4°F to 140°F
- >60,000 hours TM-21 LED Life
- 7-Year Warranty

Electrical System

- Input Voltage: 100 – 277 VAC (50 – 60 Hz)
- Available in 480V
- Power Factor: ≥95%
- THD: ≤15% at Full Load

Test and Certifications

- IP65 Rated
- CE Certified, UL Listed
- DLC Premium
- LM-80
- IES Files Available

Product Dimensions

